





TELOX

Powered by Telo Systems

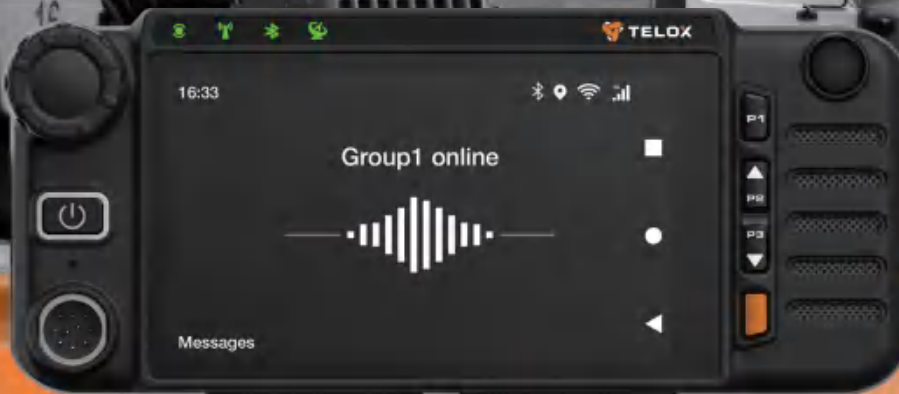

**WALK INSIDE
SMARTER DRIVE**

**INTELLIGENT LTE
VEHICLE TERMINAL**

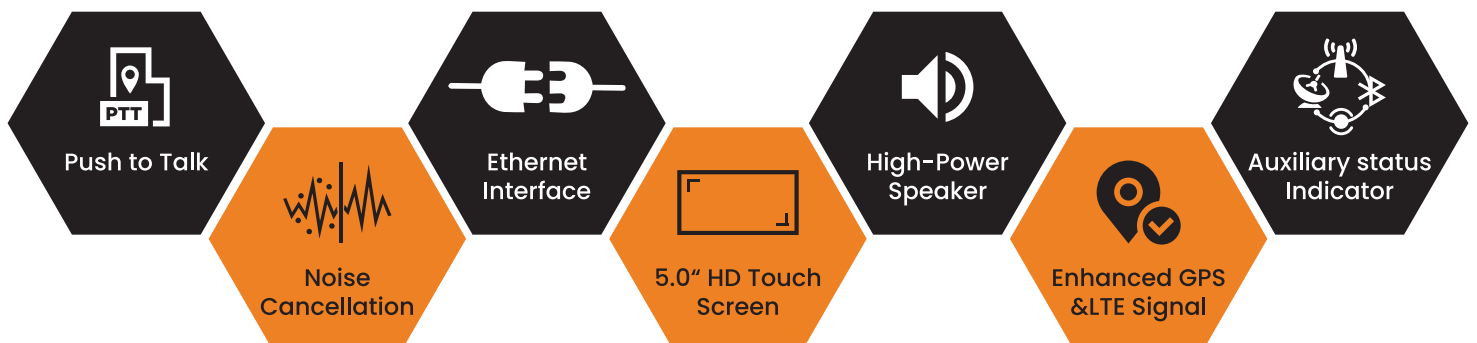

GENERAL SPECIFICATIONS



PHYSICAL CHARACTERISTICS

Dimension 198.00mm x 70.00mm x 81.20mm
7.8 in x 2.76 in x 3.2 in

Weight 442g

ENVIRONMENTAL

Dust and Water Intrusion IP54

Working temperature -20 to +60°C

PLATFORM & HARDWARE

Operating System	Android 12
Processor	MT8768V, Octa core, 2.0 Ghz
Memory	4GB RAM
	64GB Internal Storage
	Storage is expandable with external 128 GB microSD™ card
Screen	5.0-inch HD IPS Anti-Glare Screen
Touch Panel	LCD Bonded 5 points Capacitive, support wet fingers, glove operation
Power Supply	DC 12-24V
Sensor Platform	Geomagnetic sensor
	Distance sensor
	Ambient light sensor

CONNECTIVITY

VoLTE, ViLTE & VoWiFi	Support
WLAN	2.4G, IEEE 802.11 b/g/n
Bluetooth	5.0
Location	Glonass, GPS

INT Version	GSM: B2/3/5/8
Cellular Network	WCDMA: B1/2/5/8
	FDD-LTE: B1/3/5/7/8/20/28A/28B
	TDD-LTE: B38/39/40/41

US Version	GSM: B2/3/5
Cellular Network	WCDMA: B1/2/4/5
	FDD-LTE: B2/4/5/7/12/13/17/28A/28B/66
	TDD-LTE: B38/40

INTERACTION & INTERFACE

Man Machine Interface	Power Button
	Dedicated PTT Button (P1)
	Channel Switch & Volume+/- Knob
Interface	Programmable Buttons
	SOS Button
	Dual Micro-SIM card slot
	Micro-SD card slot
	10Pin aviation interface
	Type-C USB 2.0
	USB-A
	3.5mm audio interface
	3Pin power interface
	Antenna interfaces
	RJ45 interface

AUDIO

Input	Dual-Mic with Noise Cancellation Independent Noise Cancellation chip
Output	5Watt Built-in Speaker

STANDARD/OPTIONAL ACCESSORIES

☐ STANDARD
☐ OPTIONAL

 TXEA-01 External Antenna	 Power Cable	 RM-31 Remote Microphone
 Mounting Bracket Kit	 RM-31K Remote Mic with Keyboard	 TE-DP Desktop Mic & Pedal PTT
 TVS-ES150A External Speaker	 TE-SDC64 Power cable with shutdown delay	 TVC-MC200 UVC External Camera